

LUCCHINI 4542

**PRECIPITATION HARDENING
MARTENSITIC STAINLESS STEEL:
A INNOVATIVE APPROACH TO CORROSION
RESISTANT PLASTIC INDUSTRY**

**FORGING
VALUES
IN TOOL
STEELS**

IMPROVEMENT PASSION
COURAGE GROUP
PEOPLE CUSTOMER SUCCESS

GROUP
LUCCHINI RS

General characteristics

LUCCHINI 4542 is a stainless steel and it is particularly suitable for the manufacture of dies and moulds subjected to high mechanical stress.

LUCCHINI 4542 is obtained through a special 'super clean' manufacturing process, which allows an excellent level of micro-purity to be achieved.

LUCCHINI 4542 is adaptable to a wide range of applications, much more so than those obtained through other grades that are normally used in this field; LUCCHINI 4542 represents the ideal option for the end user who is looking for:

- high and homogeneous mechanical characteristics throughout the whole mould regardless of its complexity;
- resistance to corrosion.

LUCCHINI 4542 quality heat treatment occurs below the phase transformation points, this process can also be carried out on a semi-finished mould, causing minimal deformation and no cracking during the hardening phase.

Delivery conditions

LUCCHINI 4542 is supplied in age hardened condition in a dimensional range up to 350 mm in thickness.

The surface hardness is 300 – 350 HB and the mid-thickness hardness value is guaranteed in section up to 350 mm, according to the following correlation: $(HB_{\text{Surface, min required}} - HB_{\text{Core}}) \leq 20\text{HB}$.

Main features

- excellent machinability;
- excellent suitability for embossing;
- excellent wear resistance related to the mechanical properties obtained on a finished mould;
- exceptional dimensional stability after age hardening;
- no cracking during heat treatment, regardless of shape and structure of the mould;

Main application

Plastic moulding:

- dies of big/medium size for the automotive industry;
- special dies for the food industry;
- dies for rubber moulding;
- dies for compression stamping (SMC, BMC);
- die bolsters for plastic die casting;

Extrusion:

- matrices and gauges for PVC;
- various components for extrusion.

Chemical analysis

	Range	C [%]	Si [%]	Mn [%]	Cr [%]	Nb [%]	Cu [%]	Ni [%]
LUCCHINI 4542 Alloying [% in weight]	min	-	-	-	15,00	0,15	3,00	3,00
	max	0,08	1,00	1,00	17,00	0,90	5,00	5,00

Comparison with international classifications:

W. Nr. 1.4542 / 17-4 PH

DIN EN ISO 4957: X5CrNiCuNb17-4

AISI: 630

Physical and mechanical properties

Main physical properties

LUCCHINI 4542	20°C	250°C	500°C
Young modulus E [MPa]	210	198	180
Coefficient of linear thermal expansion α [10 ⁻⁶ /K]	19,0	19,8	20,5


Main mechanical properties

LUCCHINI 4542	20°C	200°C
Ultimate tensile strength UTS [MPa]	1070	1020
Yield strength YS [MPa]	900	860
Elongation (A) [%]	18	20
Reduction of area (Z) [%]	50	55


The above mentioned are average values of a sample age hardened to achieve hardness value of 35 HRC.

Microstructure

The main microstructure of LUCCHINI 4542 in age hardened condition is tempered martensite.

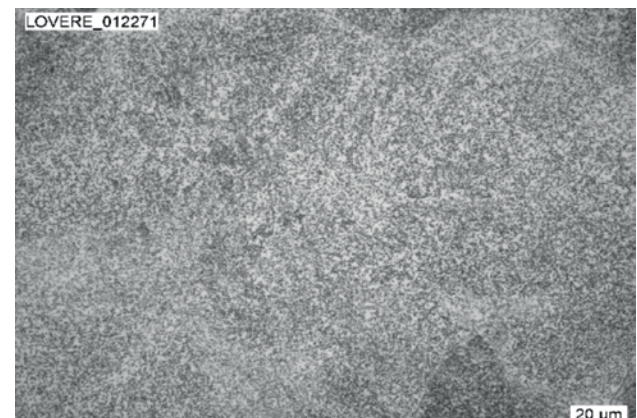


500x - Globular perlite with carbides

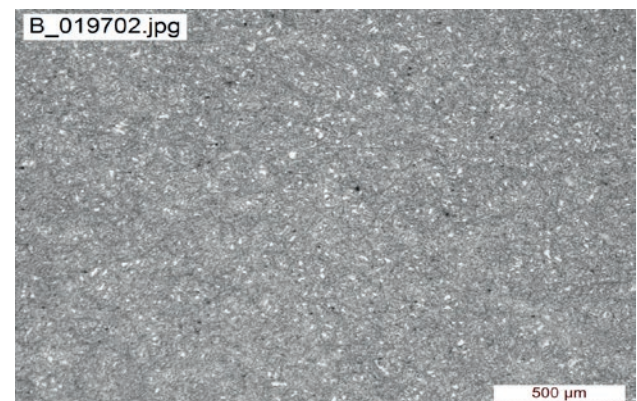


500x - Tempered martensite

Surface hardness vs tempering temperature

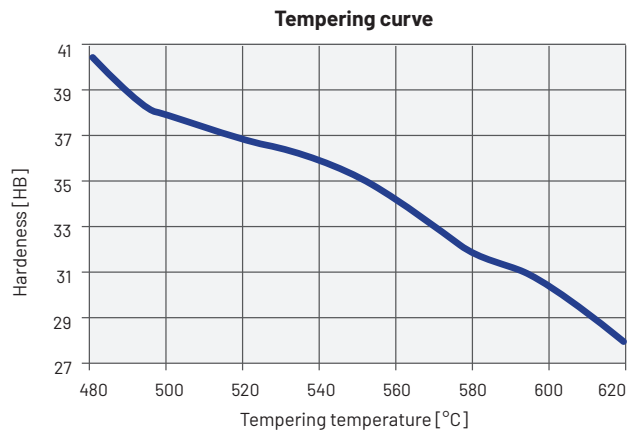

Toughness (Charpy V-notch test at 20°C) vs tempering temperature

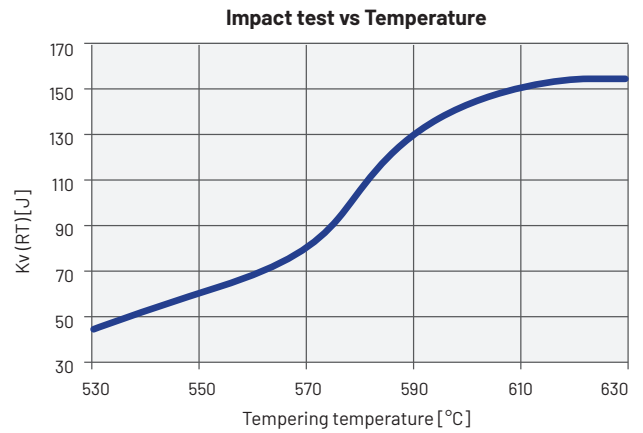

Remark: the above data are representative of the typical behaviour of a 300 mm thick block made in LUCCHINI 4542 and are reported for information only.

Heat treatment

LUCCHINI 4542 is supplied in age hardened condition with no need for additional heat treatment operations.

If different hardness/heat treatment procedure are required, we recommend the following parameters.

Note that the reported data are for information purpose only and must be adjusted to the heat treatment facility and the dimensions of the block therefore, before carrying out any heat treatment operation, it is strongly recommended to contact Lucchini RS for help and support.

Stress relieving

Suggested temperature	400°C
Soaking time	60 min every 25 mm thickness
Cooling	Slow cooling in furnace (20°C/h)

Stress relieving is recommended to reduce the tensions generated by certain manufacturing operations (e.g. machining) without affecting the hardness in the as-delivered conditions.

Solubilisation

A pre-heating step at 700°C is recommended to reduce the stress during the heating up to solubilisation temperature.

Suggested temperature	1040°C
Soaking time	60 min every 25 mm thickness
Cooling	Polymer or water quench

Other properties can be deeper analysed against specific Customer request: please contact our Metallurgy Department.

Precipitation hardening

Suggested temperature	1030°C
Soaking time	60 min every 25 mm thickness
Cooling	Polymer or water quench

Tempering

Suggested temperature	Depending on the required mechanical properties
Soaking time	120 min every 25 mm thickness
Cooling	Still air

The age hardening temperature should be selected from the graph "Tempering curve" reported above. After age hardening we suggest to carry out stress relieving at temperature 50 °C lower than the last tempering temperature.

Polishing and photo-engraving

LUCCHINI 4542 is the suitable material when polishing and photoengraving are needed. Thanks to its integrated manufacturing process, those material manufactured by Lucchini RS are characterized by a high degree of purity.

Polishing for graining: 3 Very good

Suitability for medium gloss polishing: 3 Very good

Suitability for mirror polishing: 3 Very good

Suitability for engraving: 3 Very good

Rating scale:

4 Excellent – **3 Very good** – **2 Good** – **1 Normal** – **0 Unsuitable**

Guidance for machining

The following parameters are approximate only and must be adjusted to the specific application and machine tool.

Turning

Type of insert	Rough machining		Finish machining	
	P20-P40 coated	HSS	P10-P20 coated	Cermet
V_c cutting speed [m/min]	150 ÷ 190	(*)	190 ÷ 230	260 ÷ 320
a_r cutting depth [mm]	5	(*)	< 1	< 0,5

Milling

Type of insert	Rough machining		
	P25-P35 not coated	P25-P35 coated	HSS
V_c cutting speed [m/min]	120 ÷ 140	160 ÷ 180	(*)
f_z feed [mm]	0,15 ÷ 0,3	0,15 ÷ 0,3	(*)
a_r cutting depth [mm]	2 ÷ 4	2 ÷ 4	(*)

Type of insert	Pre-finishing		
	P10-P20 not coated	P10-P20 coated	HSS
V_c cutting speed [m/min]	140 ÷ 160	180 ÷ 200	(*)
f_z feed [mm]	0,2 ÷ 0,3	0,2 ÷ 0,3	(*)
a_r cutting depth [mm]	< 2	< 2	(*)

Type of insert	Finishing		
	P10-P20 not coated	P10-P20 coated	Cermet P15
V_c cutting speed [m/min]	200 ÷ 240	250 ÷ 270	300 ÷ 340
f_z feed [mm]	0,05 ÷ 0,2	0,05 ÷ 0,2	0,05 ÷ 0,2
a_r cutting depth [mm]	0,5 ÷ 1	0,5 ÷ 1	0,3 ÷ 0,5

(*) not advisable

Drilling

Type of insert	tip with interchangeable inserts	HSS	brazed tip
V_c cutting speed [m/min]	130 ÷ 160	(*)	90 ÷ 120
f_z feed per turn [mm/turn]	0,05 ÷ 0,15	(*)	0,15 ÷ 0,25

(*) not advisable

General formulae

Type of machining	Drilling	Milling
n: number of turns of mandrel	$V_c * 1000 / \pi * D_c$	$V_c * 1000 / \pi * D_c$
V_f : feed speed [m/min]	$V_f = f_z * n$	$V_f = f_z * n * z_n$
f_z feed per turn [mm/turn]	-	$f_n = V_f / n$
Note	D_c : Milling cutter or tip diameter [mm] V_c : cutting speed [m/min] f_z : feed [mm]	f_n : feed per turn [mm/turn] z_n : No. of milling cutter inserts

Welding

Welding LUCCHINI 4542 can give good results if it is carried out using the recommended procedure.

We recommend to carry out pre-heating and heat treatment after welding.

In order to obtain the best results, we recommend the following procedure:

Material condition	Solution treating	Age hardening
Welding technique	TIG	
Pre-heating at	200 - 250°C	
Recommended Heat treatment	Age hardening aimed to obtain the required hardness (*)	

(*) The necessity for heat treatment is to be evaluated based on the zone welded. In the case of a very extensive repair it will be necessary to solution treat the piece again and age harden it a second time.

Electrical Discharge Machining (EDM)

LUCCHINI 4542 can be machined by EDM to obtain complex shape. Afterwards we advise to carry out the stress relieving procedure.

Process and materials selection for product recyclability

According to the potential of steel recycling, Lucchini RS is adopting a strategy for environmental excellence in designing and manufacturing its tool steel grades, putting eco-effectiveness into practice.

The main adopted steps are:

- to carry out an environmental assessment on processes and products, with the minimum use of virgin materials and non-renewable forms of energy;
- to move toward zero-waste manufacturing processes, considering that the ultimate destination of scrapped steel moulds becomes food for the next steel making process, that is the "waste equals food" philosophy;
- to carry out a life cycle assessment for each product and process, minimizing the environmental cost of product and service over its complete life cycles, from creation to disposal, that is the "Cradle to Cradle" philosophy

Lucchini RS S.p.A. All rights reserved. All contents of this document and all the related industrial and intellectual rights belongs exclusively to Lucchini RS S.p.A. that owns and manages the original version of it. The reproduction, disclosure, dissemination and/or changing of this document, in whole or in part, as well as the utilization of its content and/or the communication there of to third party without express written authorization of Lucchini RS S.p.A. are prohibited.

Via Giorgio Paglia, 45
24065 LOVERE (BG) - Italy
Phone +39 035 963724



www.lucchinirs.com

GROUP
LUCCHINI *RS*